

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,45 - 3,25
 Seal(s): 15324980 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00 / 15324982		2,58	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10
1005 3,00 / 15324980		3,13	250	1,95	0,05	3,30	0,10	4,70	0,10	5,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,45 - 3,25
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00 / 15324982		2,58	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10
1005 3,00 / 15324980		3,13	250	1,95	0,05	3,30	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

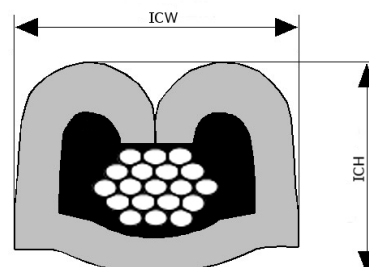

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005
 Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
 Insulation Range Φ [mm]: 3,00 - 3,25
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324980		3,13	250	1,95	0,05	3,30	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,85 - 3,81
 Seal(s): 15324981 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00 / 15324980		2,98	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,30	0,10	5,00	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,85 - 3,81
 Seal(s): 15324980 | 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00 / 15324980		2,98	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,30	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
 Insulation Range Φ [mm]: 3,45 - 3,81
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324981		3,63	250	1,95	0,05	3,30	0,10	4,90	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,50 - 4,25
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 2,00 / 15324981		3,73	200	1,70	0,05	3,25	0,10	5,30	0,10	5,10	0,10
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,30	0,10	5,20	0,10	5,10	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

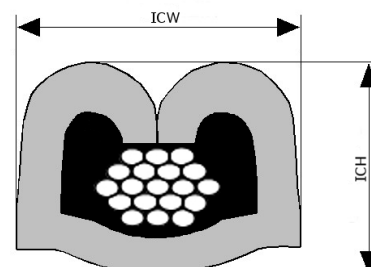

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00 | 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1009
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 3,50 - 4,25
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 2,00 / 15324981		3,73	200	1,70	0,05	3,25	0,10	5,30	0,10	5,10	0,10
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,30	0,10	5,30	0,10	5,60	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1009
 Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
 Insulation Range Φ [mm]: 4,00 - 4,25
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324981		4,13	250	1,95	0,05	3,30	0,10	5,30	0,10	5,60	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,50 - 2,66
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 2,00 / 15324982		2,58	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1026
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,85 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 2,00 / 15324980		2,98	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1026
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,85 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 2,00 / 15324980		2,98	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,00 | 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1030
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,35 - 4,20
 Seal(s): 15324981 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1030 1,00 / 15324980		2,65	126	1,55	0,05	3,20	0,10	4,60	0,10	4,50	0,10
1030 2,00 / 15324981		3,88	200	1,70	0,05	3,30	0,10	5,10	0,10	5,20	0,10

Cable type code legend:

1030:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL HEAVY

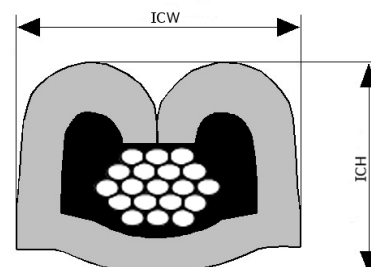

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1058
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,00 - 3,25
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1058 3,00 / 15324980		3,13	250	1,95	0,05	3,30	0,10	4,60	0,10	5,00	0,10

Cable type code legend:

1058:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NI
 Insul. Material: XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1085
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,90 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1085 1,00 / 15324980		3,00	126	1,55	0,05	3,20	0,10	4,60	0,10	4,50	0,10

Cable type code legend:

1085:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: TPE
 Insul. Wall Designator: HEAVY



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,60 - 3,10
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2003 1,50 / 15324982		2,85	160	1,55	0,05	3,20	0,10	4,50	0,10	4,40	0,10

Cable type code legend:

2003: FL4G
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: EVA, PVC
 Insul. Wall Designator: REGULAR

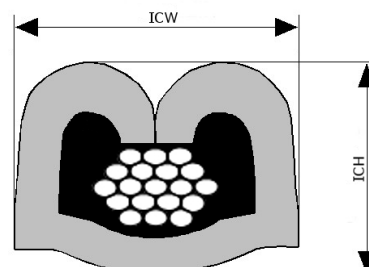

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,41 - 2,60
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2004 1,50 / 15324982		2,51	160	1,55	0,05	3,20	0,10	4,50	0,10	4,40	0,10

Cable type code legend:

2004: FLR41X-B
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN

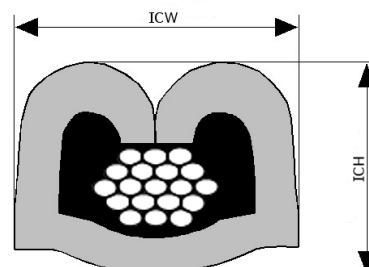

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50 | 2,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 3,00
 Seal(s): 15324980 | 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 1,50 / 15324982		2,40	160	1,60	0,05	3,25	0,10	4,60	0,10	4,50	0,10
2005 2,50 / 15324980		2,85	225	1,80	0,05	3,25	0,10	4,80	0,10	4,50	0,10

Cable type code legend:

2005: FLR2X (SAAB C)
 Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, TPE, XLPE
 Insul. Wall Designator: THIN

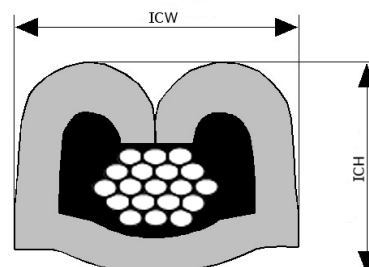

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2006
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,70 - 3,35
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 1,50 / 15324980		3,03	160	1,60	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

2006:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EPR, PVC, XLPE
 Insul. Wall Designator: REGULAR

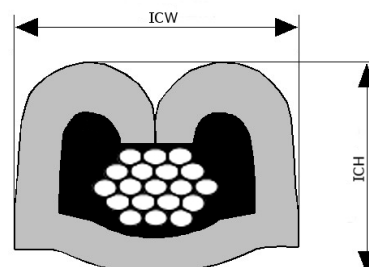

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50 | 2,50 | 3,00 | 4,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 3,70
 Seal(s): 15324980 | 15324982 | 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,50 / 15324982		2,20	160	1,60	0,05	3,25	0,10	4,60	0,10	4,50	0,10
2010 2,50 / 15324982		2,80	250	2,05	0,05	2,90	0,10	5,15	0,10	5,30	0,10
2010 3,00 / 15324980		3,10	240	1,90	0,05	3,25	0,10	5,20	0,10	4,70	0,10
2010 4,00 / 15324981		3,45	312	2,10	0,05	3,10	0,10	5,15	0,10	5,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B


Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 4,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Insulation Range Φ [mm]: 3,20 - 3,70
 Seal(s): 15324981

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 4,00 / 15324981		3,45	312	2,10	0,05	3,10	0,10	5,15	0,10	5,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B


Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,20 - 3,70
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 2,50 / 15324980		3,45	225	1,85	0,05	3,30	0,10	4,90	0,10	4,60	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

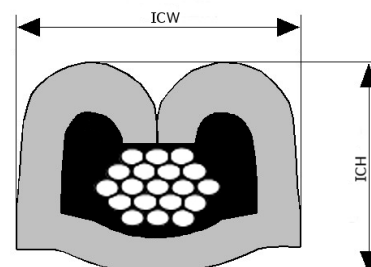

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2013
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,50 - 2,80
 Seal(s): 15324982

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 2,00 / 15324982		2,65	210	1,70	0,05	3,20	0,10	4,90	0,10	4,60	0,10

Cable type code legend:

2013:

Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3022
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,80 - 3,40
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3022 2,00 / 15324980		3,10	180	1,65	0,05	3,20	0,10	4,80	0,10	5,30	0,10

Cable type code legend:

3022:

Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,50 | 2,50

*This document is non-contractual
 and for information only.*

*For more information, please
 consult your local sales office*



Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 3,00
 Seal(s): 15324982 | 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 1,50 / 15324982		2,30	160	1,60	0,05	3,25	0,10	4,60	0,10	4,50	0,10
8000 2,50 / 15324980		2,85	225	1,85	0,05	3,30	0,10	4,90	0,10	4,60	0,10

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN

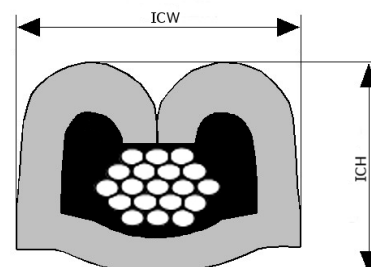

Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,84 - 3,05
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 2,00 / 15324980		2,95	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

9000:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9000
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,84 - 3,05
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 2,00 / 15324980		2,95	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

9000:

Industry Designator: MISC
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVDF
 Insul. Wall Designator: MIX



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,80 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 2,00 / 15324980		2,95	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX



Crimp Information Sheet

Terminal Part Number: 12129493
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 2,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,80 - 3,10
 Seal(s): 15324980

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 2,00 / 15324980		2,95	200	1,70	0,05	3,25	0,10	4,70	0,10	4,50	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

